

PISTOLET LW

FICHE TECHNIQUE

FR

TECHNICAL DATA SHEET

EN



Pistolet plastique anti-choc

Fiche Technique





CARACTÉRISTIQUES PRINCIPALES

- Pistolet basse pression avec jet ajustable par molette.
- Léger et facile d'utilisation.
- Structure interne en PP renforcé avec fibre de verre.
- Protection antichoc plastique souple.
- Protection fermée pour éviter l'accumulation de saletés.
- Raccord entrée en LAITON Nickelé, axe et ressort en INOX – joints NBR / EPDM.
- Fonctionne à diverses températures et pressions, pour un large champ d'applications.

CARACTERISTIQUES

SPECIFICATIONS		PISTOLET LW
Code		LB11PISTOPLAV1
Pression		12bar
Température maximum		50°C
Matériaux en contact avec l'eau		Corps PP Joints NBR/EPDM
Poids		420g
Raccord		1/2" G FEMELLE

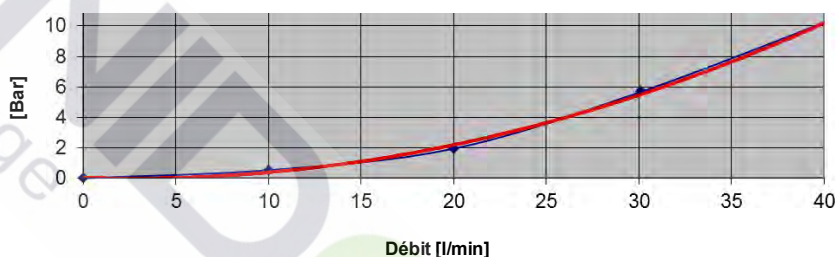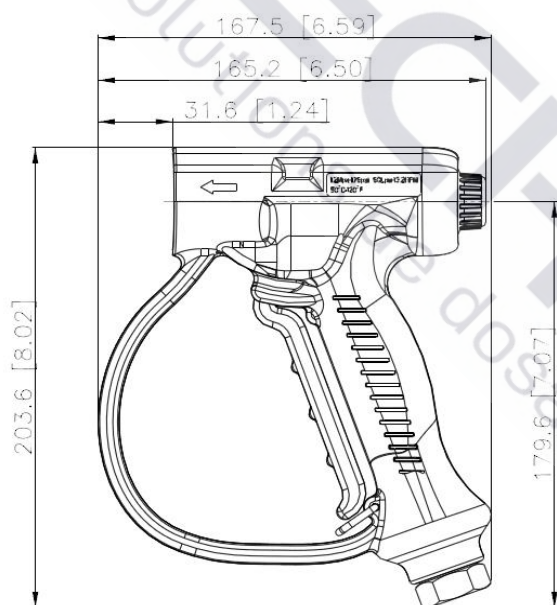

ACCESSOIRES



Tuyau

Applications

- Nettoyage professionnel pour l'industrie et l'agro-alimentaire.

Secteurs d'activité

- Industries agro-alimentaire (laiteries, abattoirs...).
- Collectivités (cantines, réfectoires, cuisines ...).
- Commerces (boucheries, poissonneries, marchés...).

Tuyau moyenne pression et eau chaude (20 bar à 70° C).

- Revêtement anti-tâches haute résistance avec renforcement en fibre de polyester.
- Couche intermédiaire spéciale et couche interne blanche pour haute tenue à la température.
- Les matériaux employés pour fabriquer le Thermoclean AL20 en font un tuyau sûr, fiable, permettant des utilisations intensives.
- Tuyau agréé contact alimentaire sim A.

Existe en différentes longueurs, équipé ou non.

Embouts & coupleurs rapides disponibles en laiton et acier inox.

Light Weight Gun

Technical Data Sheet





GENERAL FEATURES

- Low pressure spray gun with pencil/cone jet adjustable from the trigger.
- Light and easy to use.
- Internal structure in PP reinforced with glass fiber.
- Soft plastic housings shockproof and non stainable.
- Sealed case to avoid dirt stagnation.
- Inlet NICKEL BRASS swivel - S/St shaft and spring - NBR/EPDM sealing.
- Can operate at different temperatures and different pressures for a wide range of applications.

FEATURES

SPECIFICATION	PRO SPRAY GUN LW
Code	LB11PISTOPLAV1
Rated pressure	12bar
Max working temperature	50°C (122°F)
Material in contact with water	PP+GF body NBR/EPDM
Weight	420g (0.93 lb)
Inlet	1/2G FEMALE

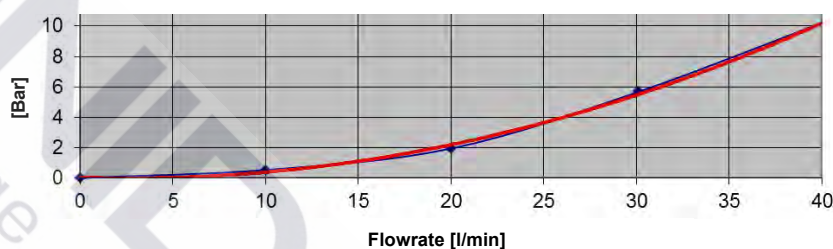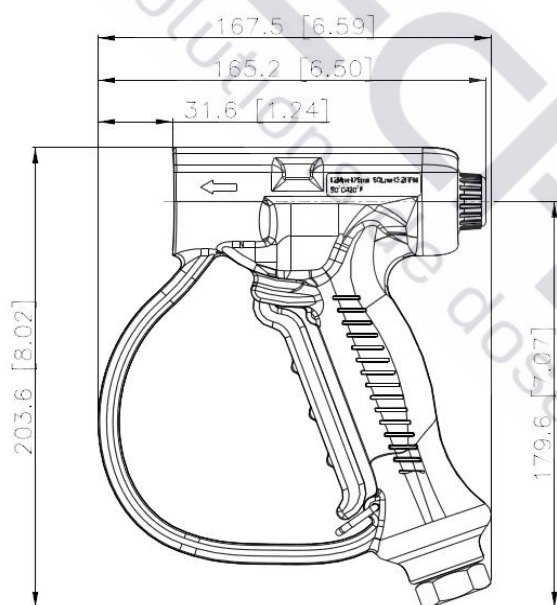

ACCESSORIES



Food cleaning Hose

Applications

- Industrial cleaning in industry and food industry.

Sectors of activity

- Food processing industries (dairies, slaughterhouses...).
- Local communities (canteens, refectories, kitchens...).
- Shopkeepers (butcher's, fish shops, markets...).



Hot water cleaning hose for medium pressure (20 bar to 70° C).

- Non-staining blue outer cover with high resistance polyester fibre reinforcement.
- Special intermediate adhesion layer and white inner layer with high temperature performance.
- Material properties used to manufacture Thermoclean AL 20 make it a high performance, safe and reliable hose able to withstand heavy duty applications.
- Food-grade quality sim A.



Different length available equipped or not.



Nipple & Quick Couplers Brass and Stainless Steel available.